

125W - 28V - 400MHz
GOLD METALLISED MULTI-PURPOSE
SILICON DMOS RF FET

FEATURES

- METAL GATE
- EXTRA LOW C_{rss}
- BROAD BAND
- SIMPLE BIAS CIRCUITS
- LOW NOISE
- HIGH GAIN

APPLICATIONS

- HF/VHF/UHF COMMUNICATIONS
from DC to 500MHz


ABSOLUTE MAXIMUM RATINGS
($T_{CASE} = 25^{\circ}C$ unless otherwise stated)

P_D	Power Dissipation	350W
BV_{DSS}	Drain-source breakdown voltage	70V
V_{GS}	Gate-source voltage	$\pm 20V$
I_D	Drain Current	20A
T_{stg}	Storage temperature	65 to $150^{\circ}C$
T_j	Maximum operating junction temperature	$200^{\circ}C$
$R_{\theta j-case}$	Thermal resistance junction-case	Max. $0.5^{\circ}C/W$

ELECTRICAL CHARACTERISTICS ($T_{CASE} = 25^{\circ}C$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
<u>PER SIDE</u>					
BV_{DSS}	Breakdown voltage, drain source $V_{GS}=0$ $I_D=100mA$	70			Vdc
I_{DSS}	Drain leakage current $V_{DS}=28V$ $V_{GS}=0$			4	mAdc
I_{GSS}	Gate leakage current $V_{GS}=20V$ $V_{DS}=0$			1	μ Adc
$V_{GS(th)}$	Gate threshold voltage $I_D=10mA$ $V_{DS}=V_{GS}$	1		7	Vdc
g_{fs}	Transconductance (300 μ s pulse) $V_{DS}=10V$ $I_D=4A$	3.2			Mhos
<u>TOTAL DEVICE</u>					
G_{PS}	Common source power gain $P_O=125W$	13			dB
η	Drain efficiency $V_{DS}=28V$ $I_{DQ}=1.6A$	50			%
VSWR	Load mismatch tolerance $f=400MHz$	20:1			
<u>PER SIDE</u>					
C_{iss}	Input capacitance $V_{DS}=0V$ $V_{GS}=-5V$ $f=1MHz$			240	pF
C_{oss}	Output capacitance $V_{DS}=28V$ $V_{GS}=0$ $f=1MHz$			120	pF
C_{rss}	Reverse transfer capacitance $V_{DS}=28V$ $V_{GS}=0$ $f=1MHz$			10	pF

DIMENSIONS

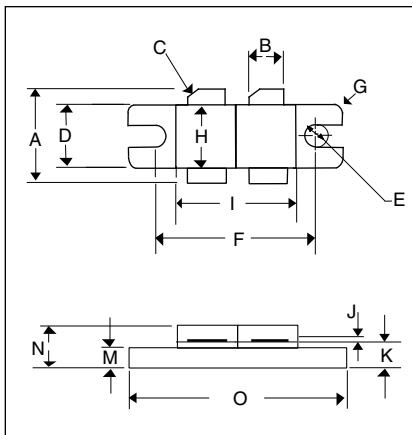

DM	Millimeter	TOL	Inches	TOL
A	13.7	MIN	.54	MIN
B	5.72	.13	.225	.005
C	45°	5°	45°	5°
D	9.78	.13	.385	.005
E	1.65R	.13	.065R	.005
F	23.75	.13	.935	.005
G	1.52R	.13	.060R	.005
H	9.53	.13	.375	.005
I	19.18	.26	.755	.010
J	.13	.02	.005	.001
K	2.54	.13	.100	.005
M	1.52	.13	.060	.005
N	4.57	.50	.180	.020
O	30.48	.13	1.200	.005

HAZARDOUS MATERIAL WARNING

The ceramic portion of the device between leads and metal flange is beryllium oxide. Beryllium oxide dust is highly toxic and care must be taken during handling and mounting to avoid damage to this area. THESE DEVICES MUST NEVER BE THROWN AWAY WITH GENERAL INDUSTRIAL OR DOMESTIC WASTE.

U.S. PATENTS 5,121,176 & 5,179,032
GLOBAL PATENTS PENDING

*D1015

*PSPICE MODEL FOR POINT NINE RF N-CHANNEL VERTICAL DMOS POWER FET

*May 2004

```
*          _____ GATE
*          I      _____ DRAIN
*          I      I      _____ SOURCE
*          I      I      I
.SUBCKT D1015  10  20  30
*Cin1,Cin2 & Lin model the input side of the package
Cin1  10   30   0.51p
Lin   10   11   0.44n
Cin2  11   30   0.51p
LG    11   12   0.6n      ;Gate bond wire inductance
CGS   12   13   184p     ;Gate-source capacitance
MOS   14   12   13      13  D1015 L=0.9U W=0.224      ;D G S B
LEVEL1
JFET  16   13   14      D1015      ;D G S
DBODY 13   16      D1015      ;P N
LS    13   30   0.2n     ;Source bond wire inductance
CGD   12   16   4p      ;Gate-drain feedback capacitance
*Cout1,Cout2 & Lout model the output side of the package
Cout1 16   30   1p
Lout   16   20   0.85n
Cout2  20   30   1p

.MODEL D1015  NMOS (VTO=4.76 KP=2.81E-5 LAMBDA=0.032 RD=0.019 RS=0.077)
.MODEL D1015  NJF  (VTO=-4.3 BETA=1 LAMBDA=0.54)
.MODEL D1015  D    (CJO=328.8P RS=0.25 VJ=0.7 M=0.35 BV=75)

.ENDS
```